


Relay Board 16 ch,1CO for Mitsubishi PLC

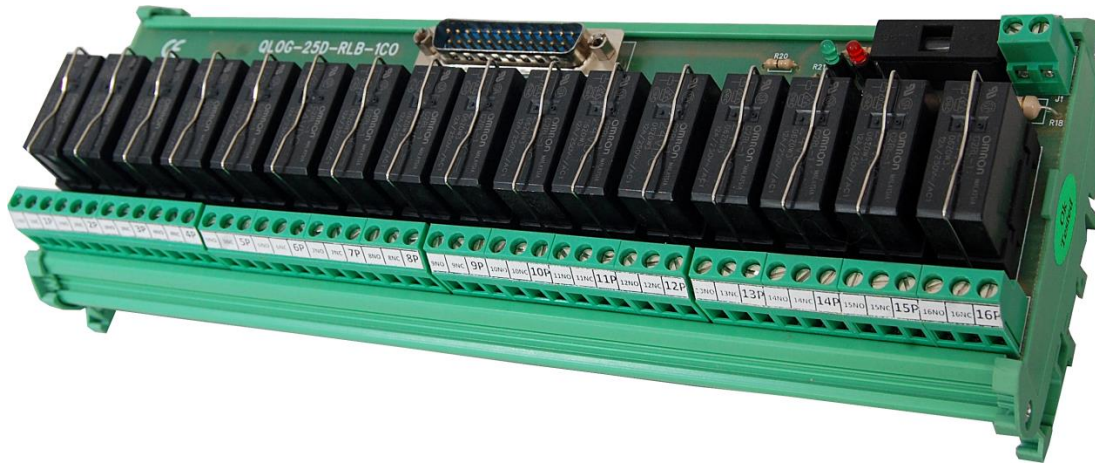

Relay Board 16 Channel ,1CO,24VDC for Mitsubishi PLC DO with D connector

Application:

This Relay Interface Module is to be used for connecting Mitsubishi 16 point DO modules with D connector to loads like contactors/solenoid valves/indications etc. Load and PLC o/p/s are galvanically isolated .

COMPONENT SPECIFICATIONS

Relay:24VDC coil,1 changeover Omron

Relay socket:1 changeover PCB soldering type

Terminals:screw type suitable for 2.5 sq. mm wires

Profile and end plates:Phoenix make

TECHNICAL SPECIFICATIONS

Input data:

Operating voltage : 24 VDC +/- 10%
Input current :Max 20mA@24 VDC
Protection across relay coil :Free wheeling diode
Indication :3mm LED
Connection : 25Pin D connector

Output Data:

Contact type :SPDT (1 changeover NO-Pole-NC)
Max. current :10Amps@250 VAC or 30 VDC
Fuse protection :available on request
Output wiring :Potential free
Terminals : screw type suitable for 2.5 sq. mm wires
Conductor size :025-2.5 sq. mm
Module dimensions (HxLxD) : 90x253x60 (WxLxH)

Order code: QLOG-25D-RLB-1CO