


Relay Board 24DC,2 CO, NC



4 Relay Board 24VDC,2CO,Negative Common

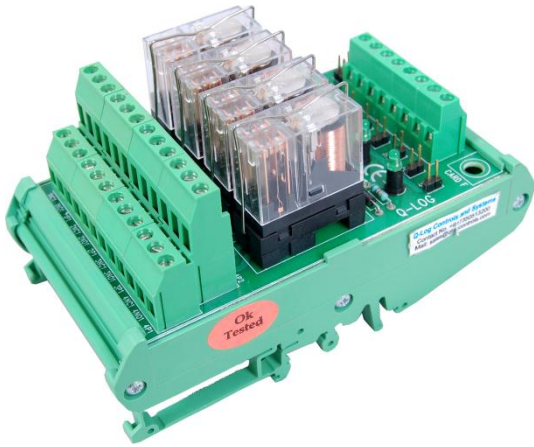

Application:

Relay Interface Module 2 changeover DC used to interface 24DC digital outputs to contactors/solenoid valves/indications etc. Load and PLC o/ps are galvanically isolated

COMPONENT SPECIFICATIONS

Relay:24VDC coil,2 changeover Omron/ OEN

Relay socket:2 changeover PCB soldering type

Terminals:Double decker suitable for 2.5sq mm wires

Profile and end plates:Phoenix make



8 Relay board,24VDC,2CO,Negative Common



TECHNICAL SPECIFICATIONS

Input data:

Operating voltage	: 24 VDC +/- 10%
Input current	:Max 20mA@24 VDC/AC
Protection across relay coil	:Free wheeling diode
Indication	:3mm LED
No of relays	:2 or 4 or 8
Terminals	: screw type suitable for 2.5 sq. mm wires
Conductor size	:025-2.5 sq. mm
Insulation stripping length	:7 mm

Output Data:

Contact type	:DPDT (2 changeover contacts NO-Pole-NC)
Max. current	:5 Amps@250 VAC or 30 VDC
Output wiring	:Potential free
Terminals	: Double decker screw type suitable for 2.5 sq. mm wires
Conductor size	:0.25-2.5 sq. mm
Insulation stripping length	:7 mm
Module dimensions (HXLXD)	: 125x36x70 (2 Relay board) 125x70x70 (4 Relay board) 125x130x70 (8 Relay board)