


Relay Board 24VAC/DC,2 CO

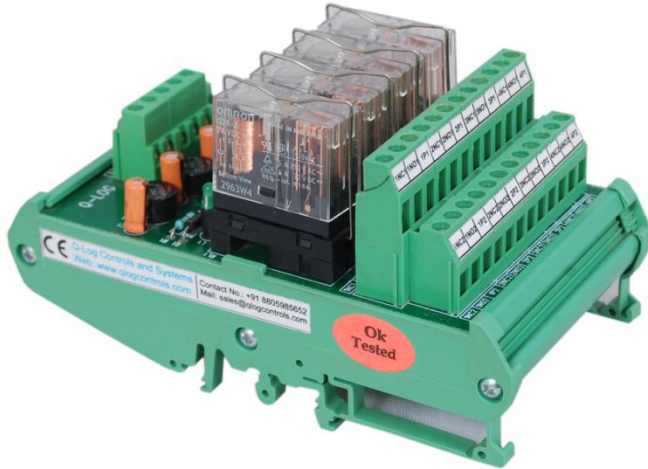

Product Picture 4 Relay Board 24AC/DC,2CO

Application:

Relay Interface Module 2 changeover AC/DC used to interface 24VAC/DC digital outputs to contactors/soleoid valves/indications etc. Load and PLC o/ps or transformer secondary are galvanically isolated

COMPONENT SPECIFICATIONS

Relay:24VDC coil,1 changeover Omron/OEN

Relay socket:2 changeover PCB soldering type

Terminals:screw type suitable for 2.5 sq. mm wires

TECHNICAL SPECIFICATIONS

Input data:

Operating voltage	:24 VAC/24 VDC +/- 10%
Input current	:Max 20mA@24 VDC
Protection across relay coil	:Free wheeling diode
Indication	:3mm LED
Sink/Source	:selectable by jumpers
Terminals	: screw type suitable for 2.5 sq. mm wires
Conductor size	:025-2.5 sq. mm
Insulation stripping length	:7 mm

Output Data:

Contact type	:DPDT (2 changeover NO-Pole-NC)
Max. current	:10Amps@250 VAC or 30 VDC
Fuse protection	:available on request
Output wiring	:Potential free
Terminals	: screw type suitable for 2.5 sq. mm wires
Conductor size	:025-2.5 sq. mm
Insulation stripping length	:7 mm
Module dimensions (HXLXD)	: 125x38x70 (2 Relay board) 125x70x70 (4 Relay board) 125x134x70 (8 Relay board)